

Installing SendSMS CDMA 3.0 Bulk SMS Software is very easy. Before Installation please keep this in mind that SendSMS CMDA and Nokia PC Suite can not run side by side i.e. you need to disable Nokia PC Suite before start using SendSMS CMDA Bulk SMS Software for Nokia CDMA mobiles.

Detecting Nokia PC Suite on the System

1. Click on Start Menu
2. Go to Control Panel
3. Click on "Add and Remove Programs"
4. If in the listing you find "Nokia PC Suite" that's mean its installed on your system.

Disabling Nokia PC Suite




Check for the above phone ICON on the task bar near the system clock.


(If this icon is present then it shows that your system has Nokia PC Suite).

If you PC has the Nokia PC suite installed then follow the below steps or else you can ignore the PC suite steps.

Take your mouse over this ICON and then click RIGHT MOUSE BUTTON.

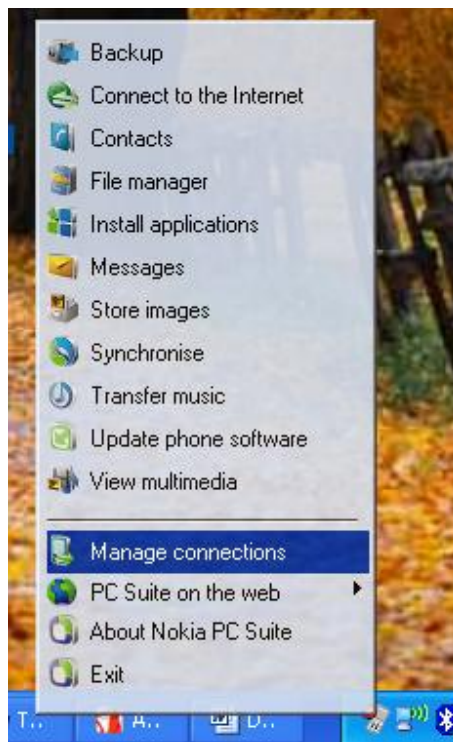

Here you will find "Manage Connections" tab. As highlighted above. CLICK on this option.

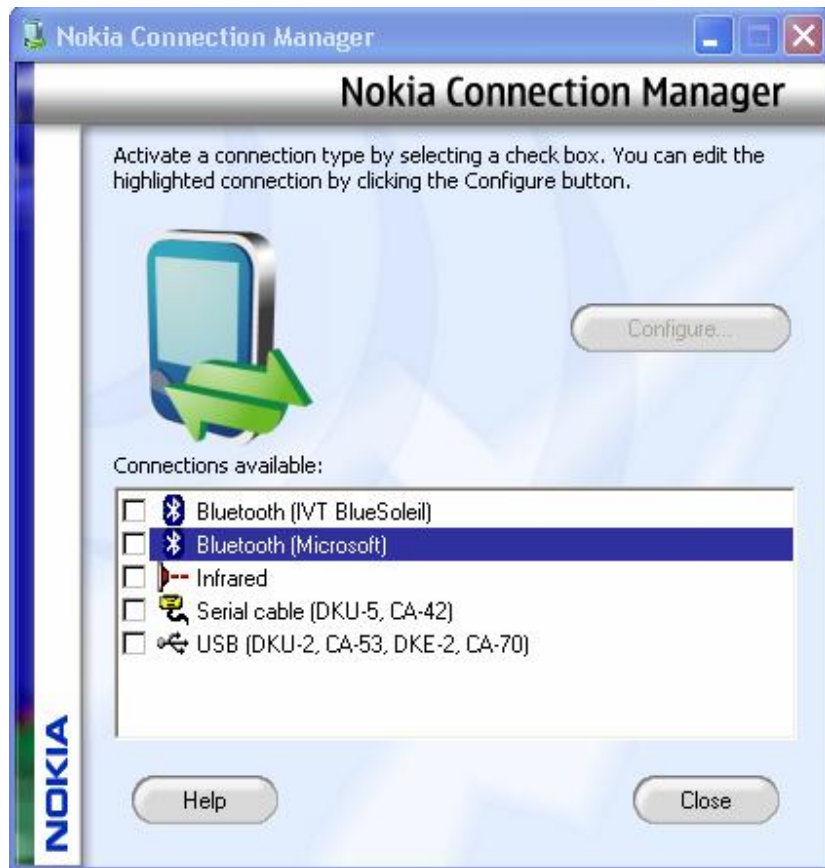

Here you will find all the connectivity methods available on your system. Some options are automatically selected depending upon the hardware available.

UN SELECT (UN-CHECK) all the options as shown above.


Now press "CLOSE".

Detecting PORT Number on which your mobile is connected.

Click on the START Menu and then got "Control Panel" as highlighted below.




Here you will find "Phone and Modem Options". Select and open this option.

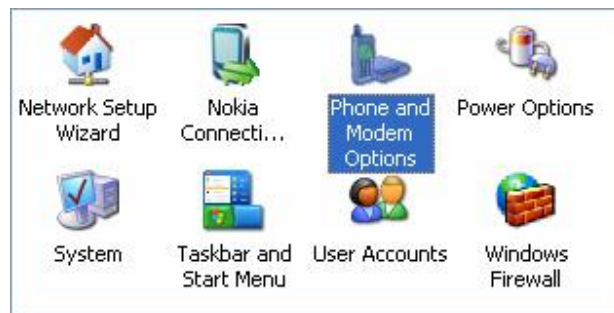

Select the "Modems" Tab.

Here you will find a list of all connected modems and their COM Port Numbers.

Check and remember the PORT No of your modems in "Attached To" column and in front of your modem's name.

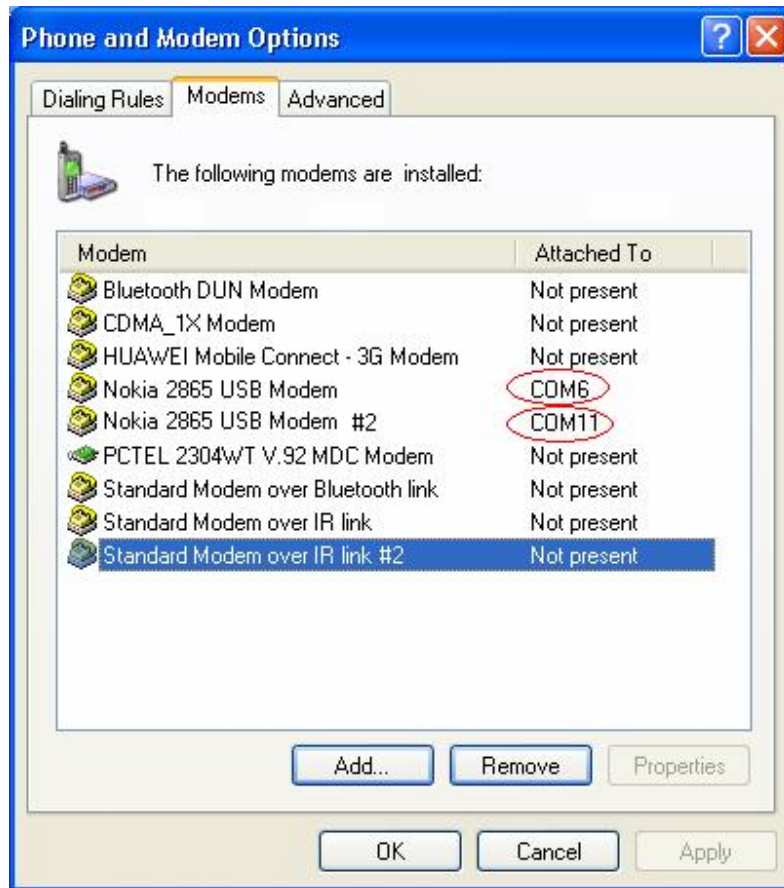

E.g. We are using two "Nokia 2865" phones which are connected to COM6 and COM11.

Now close all the windows.

Configure SendSMS CDMA SMS Software

Open our software SendSMS CDMA.


Click on Preferences button on the Main Toolbar.



In this window you will find Phones Tab.

If you are using single mobile or modem with this software enter 6 in "Phone 1" (Shown in blue circle below). If you are using multiple phones (more than 1) Check the box next to "Phone 2" (for 2 phones) and enter 11 in "Phone 2" field (Shown in red circle below).

Remember we just got these numbers from the previous step.

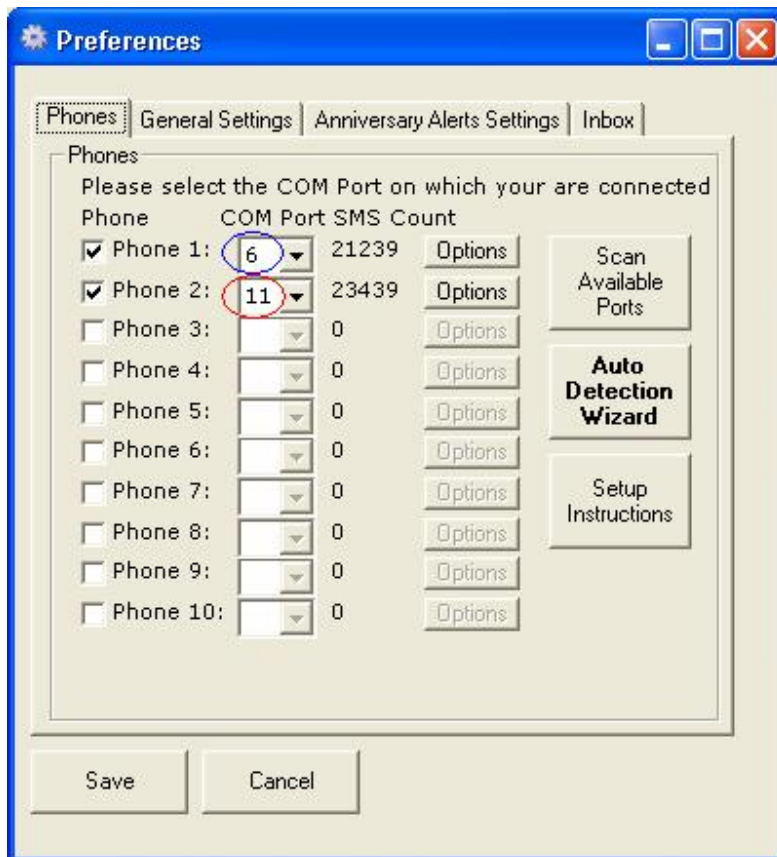

Click on "Save" button. Your settings are now saved successfully.

At the bottom of our software window you will get a message as below.

It will show number of mobiles properly connected currently with the software.



You are now ready to send messages.

We value your feedback and suggestions. You can contact us using the details below

You can email us on sales@funonphone.com

You can call us on: 0253-2378252 / 9370119223 / 9423964829